

P.V.C hose

STEEL WIRE REINFORCED PVC HOSE

FEATURES


1. Good transparency & easy monitoring liquid flow.
2. Oil, chemical & weather condition resistant, temperature range : 0° C ~ +65° C.
3. Large flow capacity (smooth interior surface enable less resistant to fluid)
4. High flexible & pliability (bending-radius is slightly larger than normal braid hoses).
5. Easy band clamping .

APPLICATION

1. Oil, water & chemical of various industrial machines .
2. Suction feeding or pressure-force transfer various pulverulent materials .
3. For corrosion-proof protection hoses for under ground piping .
4. Foodstuffs .
5. Vacuuming .

NOTICE

1. The bending radius is 4 times of the inner diameter .
2. Do not placed the hoses under heavy object for avoiding deformation of steel wire coil .

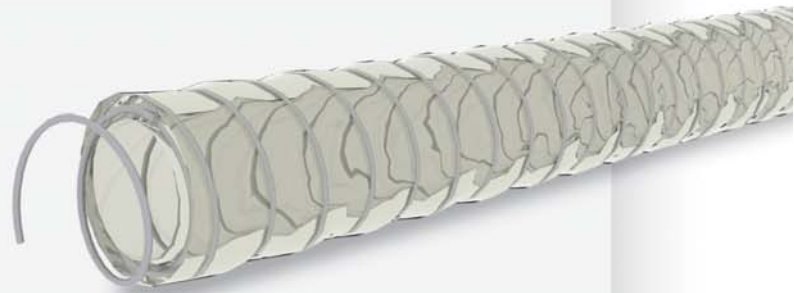

Normal Dimension	Hose Dimension		W.P.	B.P.		Net Weight	Measurement	
	ID x OD			at 20c°	at 60c°			
	inch	mm		m/roll	kgs/cm ²			kgs/cm ²
1/4	6.3	11	100	8	70	16	9	0.036
5/16	8	13.5	100	8	60	16	13	0.046
3/8	9.5	15	100	8	55	15	16	0.053
1/2	12.7	18	100	5	40	15	19	0.058
5/8	16	22	100	5	35	13	28	0.090
3/4	19	26	50	4	30	12	21	0.063
1	25.4	33	50	4	25	10	27	0.103
1 1/4	31.8	41	40	3	20	9	31	0.160
1 1/2	38.1	48	40	3	18	8	38	0.235
1 3/4	45	56	40	3	16	8	55	0.305
2	51	62	40	3	14	8	60	0.248
2 1/2	63	80	20	2	12	7	54	0.334
3	76	92	20	2	11	7	63	0.473
3 1/2	90	108	10	2	9	5	44	0.506
4	102	118	10	2	7	5	48	0.708

P.V.C hose


PVC SHOWER HOSE

FEATURES

1. Soft pvc hose with polyester reinforced .
2. Good resistant to hot water .

APPLICATION

1. Shower , bath & toilet fitting .

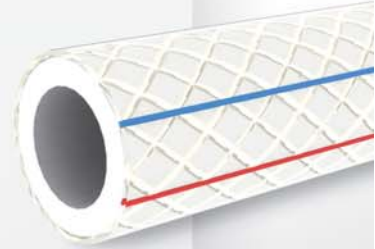

Hose Dimension			W.P.	B.P.		Net Weight	Measurement
ID x OD		Length		at 20c°	at 60c°		
mm		m/roll	kgs/cm ²	kgs/cm ²		kg/roll	m ³ /roll
8.5	13.5	100	10	56	25	11.2	0.029
9	14	100	10	56	25	11.7	0.029
10	15	100	10	56	25	12.7	0.030

PVC AIR HOSE

FEATURES

1. With high strength polyester yarn, high pressure-resistant
2. Oil & chemicals resistant .
3. Available in different colours & pressure .

APPLICATION

1. Compressed air pipe & hydraulic system of industrial equipment .
2. Mining, construction .

NOTICE

1. Do not close to the object with higher temperature such as welding spark



Normal Dimension	Hose Dimension			W.P.	B.P.	Net Weight	Measurement
	ID x OD		Length				
inch	mm		m/roll	kgs/cm ²	kgs/cm ²	kg/roll	m ³ /roll
5/16	8.5	14	100	35	105	12.8	0.024
3/8	9.5	16	100	27	95	16	0.028
1/2	12.7	20	100	21	70	25	0.046
5/8	16.0	25	40	18	60	15.5	0.038
3/4	19.0	28.5	40	16	52	17.5	0.047
1	25.4	34.5	40	15	45	22	0.086

P.V.C hose


PVC RED / WHITE STRIPE HOSE

FEATURES

1. Light weight, easily handled
2. Available in different colours .

APPLICATION

1. Water delivery in garden , civil uses .

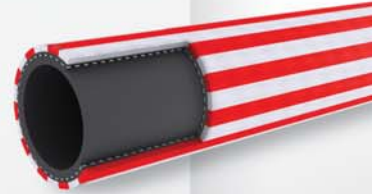

Normal Dimension	Hose Dimension		Net Weight	Measurement	
	ID x OD				Length
	inch	mm		m/roll	kg/roll
1/2	12.9	15	40	3.3	0.022
5/8	16.0	18	40	4.0	0.036
3/4	19	22	40	5.0	0.030
1	25.4	29	25	5.5	0.051


PVC GARDEN HOSE

FEATURES

1. Resistance to weather condition, temperature range : 0° C ~ +65° C
2. Light weight & durability .
3. Available in different colours & thickness .
4. Soft pvc with polyester yarn reinforced

APPLICATION

1. Water delivery in garden , washing car , construction , other daily uses.

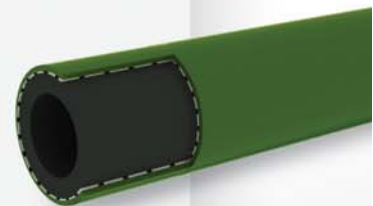

Normal Dimension	Hose Dimension		Net Weight	Measurement	
	ID x OD				Length
	inch	mm		m/roll	kg/roll
1/2	12.7	16.5	50	6	0.024
5/8	16	20	50	8	0.032
3/4	19	24	50	10	0.057
1	25.4	31	50	17	0.088

P.V.C hose

PVC REINFORCED HOSE

FEATURES


1. Flexible hose resistant to weather condition, temperature range : 0° C ~ +65° C .
2. Soft PVC hose with polyester yarn reinforced .
3. Light weight & easy handling .
4. Good transparent & easy monitoring the liquid flow .
5. Self-extinguishing characteristic & insulation.
6. Available in different colours & thickness .

APPLICATION

1. Various machine tools & industrial machines .
2. Transportation of chemical.
3. Civil engineering & construction .
4. Jacketing for corrosion-protection & insulation .
5. Foodstuffs .

NOTICE

1. The bending radius is 5 times of the inner diameter
2. Not for welding use .

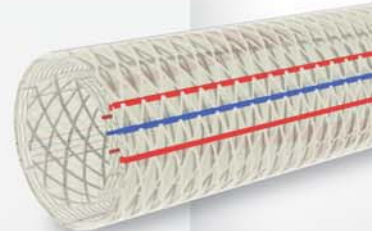

Normal Dimension	Hose Dimension		W.P.	B.P.		Net Weight	Measurement	
	ID x OD			at 20c°	at 60c°			
	inch	mm		m/roll	kgs/cm ²			kgs/cm ²
5/32	4	8	100	10	77	30	4.9	0.010
3/16	5	9	100	10	73	30	5.7	0.016
1/4	6.4	10	100	10	65	28	6.5	0.017
5/16	8	12	100	10	56	25	8.2	0.024
3/8	9.5	14	100	10	56	25	9.8	0.028
1/2	12.7	17	100	10	52	23	14.8	0.046
5/8	16	20	50	8	46	21	8.9	0.032
3/4	19	25	50	8	38	20	13.5	0.057
1	25.4	32	50	6	30	15	20.4	0.088
1 1/4	31.8	40	40	4	23	15	23.5	0.118
1 1/2	38.1	47	40	4	19	13	31.2	0.152
2	51	61	30	4	17	10	37.4	0.247

PVC GAS HOSE

FEATURES

1. Good insulation, fire-resistance .
2. Safe & durable .

APPLICATION

1. Delivery for liquid gas, liquefied petroleum gas (LPG) .




Normal Dimension	Hose Dimension		Net Weight	Measure . Ment	
	I.D. x O.D.				
	inch	mm			m/roll
3/8	9	15	50	8	0.022

P.V.C hose

POWER SPRAY HOSE

- CHARACTERISTICS**
1. Pressure resistance : High pressure resistance.
 2. Excellent elasticity : With high elasticity and flexibility.
 3. Chemical resistance : Good resistance against corrosion caused by acids , alkalies , oils & salts .
 4. Light weight : This hose is 30% lighter than rubber hose .

- USES**
1. For spraying agricultural chemicals : farmland , orchard , vinyl plastic hothouse , etc.
 2. For digging land , mines , road , etc.
 3. For washing ships , vehicles , etc.

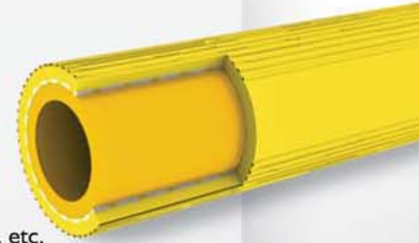

Normal Dimension mmxm	ID mm	Thickness mm	W.P. kgs/cm ²	B.P.		Net Weight kg/roll
				at 20c°	at 60c°	
7.5x100	7.5 ± 0.5	2.75	40	150	78	12
8.5x100	8.5 ± 0.5	2.75	40	150	78	13
10.1x100	10.0 ± 0.6	3.00	35	135	58	17
12.5x100	12.5 ± 0.6	3.25	32	120	53	21

PVC SCREW DRAIN & PUMP HOSE TRANSPARENT AND GREEN

- FEATURES**
1. Transparent and green with a good cold & hot resistance.
 2. Small bending radius & great capability of minus pressure resistance.

- APPLICATION**
1. Drawing & conveying water, oil & powder in factory, agriculture, building.



Normal Dimension inch	Length m/roll	W.P. kgs/cm ²	B.P. kgs/cm ²	Net Weight kg /roll
1	32	8	32	11.70
1 1/4	32	8	30	15.40
1 1/2	32	8	26	17.60
2	32	7	24	23.50
2 1/2	32	6	20	35.20
3	32	5	20	41.60
4	32	5	16	70.40
5	32	4	13	102.40
6	32	4	12	137.60

P.V.C hose

PVC CLEAR HOSE

FEATURES

1. Lightweight & flexible .
2. Good chemical, abrasion & weather resistance .
3. Easily handled & economically prices .
4. Supplied in neat rolls for easy storage .
5. Available in different colours & thickness .

APPLICATION

1. Permanent general applications in machinery , construction & aquatic equipment .
2. A standby for emergency repairs.



Normal Dimension	Hose Dimension		Length	Net Weight	Measurement
	ID x OD				
	inch	mm		m/roll	kgs/roll
1/4	6	8	100	2.86	0.009
5/16	8	10	100	3.67	0.012
3/8	10	12	100	4.49	0.014
1/2	12	14.4	100	6.47	0.029
5/8	15	17.4	50	3.97	0.018
3/4	19	22	50	6.28	0.037
1	25	30	50	14.03	0.075
1 1/4	32	38	40	17.14	0.150
1 1/2	38	45	40	23.72	0.180
2	50	58	30	26.45	0.270


PVC FIRE HOSE

FEATURES

1. With good quality modified PVC, fire-resistance .
2. High strength polyester yarn to ensure resistance higher water pressure .
3. Flexible in different colours, smooth or corrugated surface .

APPLICATION

Accessories of fire equipments in factory, building , construction .

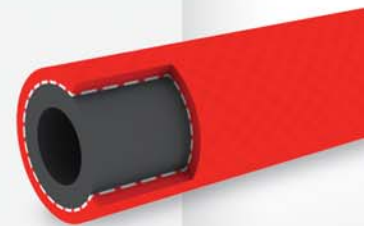

Normal Dimension	Hose Dimension			W.P.	B.P.	Net Weight	Measure .Ment
	I.D. x O.D.		Length				
	inch	mm		m/roll	kgs/cm ²	kgs/cm ²	kg/roll
3/4	19.0	25	30	15	62	8.2	0.026
1	25.4	33	30	15	62	14.2	0.030