

# P.V.C hose

## PVC REINFORCED HOSE

### FEATURES


1. Flexible hose resistant to weather condition, temperature range : 0° C ~ +65° C .
2. Soft PVC hose with polyester yarn reinforced .
3. Light weight & easy handling .
4. Good transparent & easy monitoring the liquid flow .
5. Self-extinguishing characteristic & insulation.
6. Available in different colours & thickness .

### APPLICATION

1. Various machine tools & industrial machines .
2. Transportation of chemical.
3. Civil engineering & construction .
4. Jacketing for corrosion-protection & insulation .
5. Foodstuffs .

### NOTICE

1. The bending radius is 5 times of the inner diameter
2. Not for welding use .

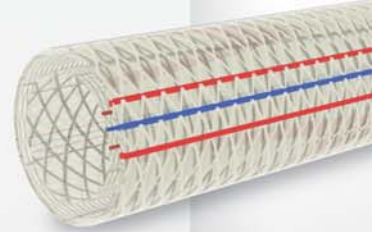

Normal Dimension	Hose Dimension		W.P.	B.P.		Net Weight	Measurement	
	ID x OD			at 20c°	at 60c°			
	inch	mm		m/roll	kgs/cm <sup>2</sup>			kgs/cm <sup>2</sup>
5/32	4	8	100	10	77	30	4.9	0.010
3/16	5	9	100	10	73	30	5.7	0.016
1/4	6.4	10	100	10	65	28	6.5	0.017
5/16	8	12	100	10	56	25	8.2	0.024
3/8	9.5	14	100	10	56	25	9.8	0.028
1/2	12.7	17	100	10	52	23	14.8	0.046
5/8	16	20	50	8	46	21	8.9	0.032
3/4	19	25	50	8	38	20	13.5	0.057
1	25.4	32	50	6	30	15	20.4	0.088
1 1/4	31.8	40	40	4	23	15	23.5	0.118
1 1/2	38.1	47	40	4	19	13	31.2	0.152
2	51	61	30	4	17	10	37.4	0.247

## PVC GAS HOSE

### FEATURES

1. Good insulation, fire-resistance .
2. Safe & durable .

### APPLICATION

1. Delivery for liquid gas, liquefied petroleum gas (LPG) .



Normal Dimension	Hose Dimension		Net Weight	Measure . Ment	
	I.D. x O.D.				
	inch	mm			m/roll
3/8	9	15	50	8	0.022