


Mandrel built

Chemical hose

EPDM CHEMICAL DELIVERY HOSE

- TUBE** : Chemical resistant smooth EPDM
- REINFORCEMENT** : High tensile synthetic cord with antistatic copper wire
- COVER** : Weather, ozone & abrasion resistant, smooth, black EPDM
- APPLICATION** : Used for discharge of chemical & acids
- TEMPERATURE** : -30° C ~ +100° C (-22° F ~ +212° F)

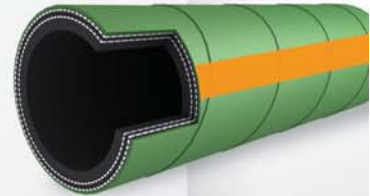

ID		OD	WP		BP		L
inch	mm	mm	bar	psi	bar	psi	mt
3/4	19.0	31	10	150	30	450	60
1	25.4	37	10	150	30	450	60
1 1/4	31.8	44	10	150	30	450	60
1 1/2	38.1	51	10	150	30	450	60
2	51	65	10	150	30	450	60
2 1/2	63	79	10	150	30	450	60
3	76	92	10	150	30	450	60
4	102	118	10	150	30	450	60

EPDM CHEMICAL SUCTION & DELIVERY HOSE

- TUBE** : Chemical resistant smooth EPDM
- REINFORCEMENT** : High tensile synthetic cord with wire helix & antistatic copper wire
- COVER** : Weather, ozone & abrasion resistant, smooth, black EPDM
- APPLICATION** : Used for suction & discharge of chemical & acids
- TEMPERATURE** : -30° C ~ +100° C (-22° F ~ +212° F)



ID		OD	WP		BP		L
inch	mm	mm	bar	psi	bar	psi	mt
3/4	19.0	31	10	150	30	450	60
1	25.4	37	10	150	30	450	60
1 1/4	31.8	44	10	150	30	450	60
1 1/2	38.1	51	10	150	30	450	60
2	51	65	10	150	30	450	60
2 1/2	63	79	10	150	30	450	60
3	76	92	10	150	30	450	60
4	102	118	10	150	30	450	60

Mandrel built

Chemical hose

XLPE CHEMICAL DELIVERY HOSE

- TUBE** : Chemical & solvent resistant translucent XLPE.
- REINFORCEMENT** : High tensile synthetic cord with antistatic copper wire
- COVER** : Weather, ozone & abrasion resistant, smooth, green EPDM
- APPLICATION** : Used for discharge of chemical & acids
- TEMPERATURE** : -30° C ~ +80° C (-22° F ~ +176° F)



ID		OD	WP		BP		L
inch	mm	mm	bar	psi	bar	psi	mt
3/4	19	31	12	180	36	540	60
1	25.4	37	12	180	36	540	60
1 1/4	31.8	44	12	180	36	540	60
1 1/2	38.1	51	12	180	36	540	60
2	51	65	12	180	36	540	60
2 1/2	63	79	12	180	36	540	60
3	76	92	12	180	36	540	40
4	102	118	12	180	36	540	40

XLPE CHEMICAL SUCTION & DELIVERY HOSE

- TUBE** : Chemical & solvent resistant translucent XLPE.
- REINFORCEMENT** : High tensile synthetic cord with helix & antistatic copper wire
- COVER** : Weather, ozone & abrasion resistant, smooth, green EPDM
- APPLICATION** : Used for discharge of chemical & acids
- TEMPERATURE** : -30° C ~ +80° C (-22° F ~ +176° F)



ID		OD	WP		BP		L
inch	mm	mm	bar	psi	bar	psi	mt
3/4	19	31	12	180	36	540	60
1	25.4	37	12	180	36	540	60
1 1/4	31.8	44	12	180	36	540	60
1 1/2	38.1	51	12	180	36	540	60
2	51	65	12	180	36	540	60
2 1/2	63	79	12	180	36	540	60
3	76	92	12	180	36	540	40
4	102	118	12	180	36	540	40