


Extrude

Air hose

LIGHT DUTY AIR HOSE


- TUBE** : Synthetic rubber
- REINFORCEMENT** : High tensile, synthetic textile & filament yarn
- COVER** : Ozone & weather resistant synthetic rubber, smooth, black I 4 lines
- APPLICATION** : For use with air compressor in mines, quarries , service stations, construction sites, shipyard, manufacturing industries & general services
- TEMPERATURE** : -20° C ~ +80° C

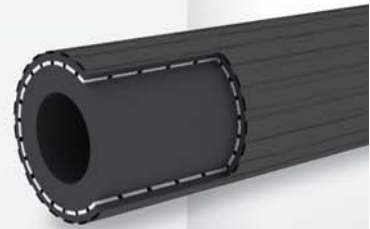

ID		OD	WP	BP	L
inch	mm	mm	bar	bar	m
1/4	6.3	12.5	10	30	100
5/16	8.0	15.5	10	30	100
3/8	9.5	16.5	10	30	100
1/2	12.7	20.0	10	30	100
5/8	16.0	24.0	10	30	100
3/4	19.0	28.0	10	30	100
1	25.4	36.0	10	30	100
1 1/4	31.8	46.0	10	30	50
1 1/2	38.1	52.0	10	30	50

MEDIUM DUTY AIR HOSE

- TUBE** : Synthetic rubber
- REINFORCEMENT** : High tensile, synthetic textile & filament yarn
- COVER** : Ozone & weather resistant synthetic rubber, smooth, black I 4 lines
- APPLICATION** : For use with air compressor in mines, quarries , service stations, construction sites, shipyard, manufacturing industries & general services
- TEMPERATURE** : -20° C ~ +80° C

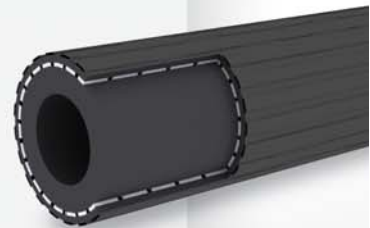

ID		OD	WP	BP	L
inch	mm	mm	bar	bar	m
1/4	6.3	13.0	15	45	100
5/16	8.0	16.0	15	45	100
3/8	9.5	17.0	15	45	100
1/2	12.7	22.0	15	45	100
5/8	16.0	25.0	15	45	100
3/4	19.0	29.0	15	45	100
1	25.4	37.0	15	45	100
1 1/4	31.8	47.0	15	45	50
1 1/2	38.1	53.0	15	45	50

Extrude

Air hose

HEAVY DUTY AIR HOSE

- TUBE** : Synthetic rubber
- REINFORCEMENT** : High tensile, synthetic textile & filament yarn
- COVER** : Ozone & weather resistant synthetic rubber, smooth, black 14 lines
- APPLICATION** : For use with air compressor in mines, quarries , service stations, construction sites, shipyard, manufacturing industries & general services
- TEMPERATURE** : -20° C ~ +80° C



ID		OD	WP	BP	L
inch	mm	mm	bar	bar	m
1/4	6.3	14.5	20	60	100
5/16	8.0	16.5	20	60	100
3/8	9.5	18.5	20	60	100
1/2	12.7	24.0	20	60	100
5/8	16.0	28.0	20	60	100
3/4	19.0	30.0	20	60	100
1	25.4	39.0	20	60	100
1 1/4	31.8	48.0	20	60	50
1 1/2	38.1	54.0	20	60	50

JACK HAMMER HOSE

- TUBE** : Oil use with air compressors synthetic rubber
- REINFORCEMENT** : High tensile, synthetic textile & filament yarn
- COVER** : Ozone & weather resistant synthetic rubber , Smooth , Yellow
- APPLICATIONS** : for use with air compressors in construction work , Quarries & many civil engineering & industrial application
- TEMPERATURE** : -20° C ~ +80° C



ID		OD	WP	BP	L
inch	mm	mm	bar	bar	m
3/4	19.0	30.0	20	60	100
1	25.4	39.0	20	60	100